



U-TUBE COLD CATHODE UV LAMP

This is effective when it compacts the unit or when it obtains more output with the same size. Since it is a one-sided lead, it is easy to handle and it can select the lead wire type or socket type.


GY9.5

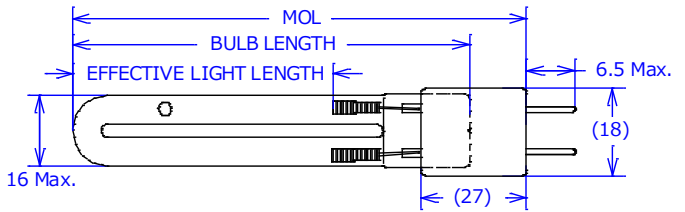

LEAD CABLE

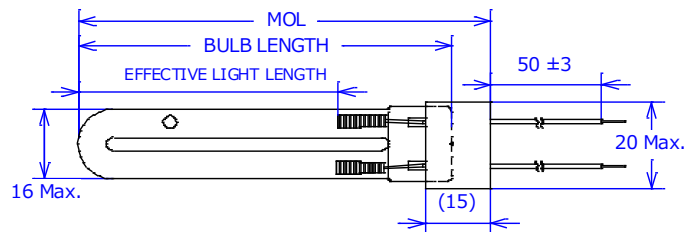

DOUBLE U-SHAPET TUBE

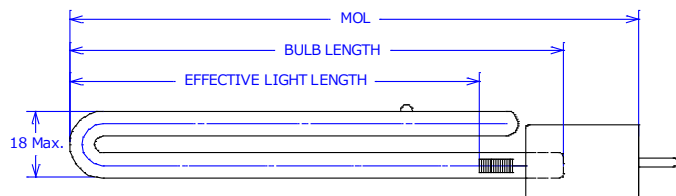

TCGU series Specification table

* The applicable inverter is 『HAC-012V2010』.

TCGU	Base And Terminal	Lamp Current mA rms	Lamp Voltage V rms	Watts W	UV Intensity $\mu\text{W}/\text{cm}^2/10\text{cm}$	Ozone Amount mg/hrs	Average Life hrs	Effective Light Length mm	Bulb Length mm	Max Overall Length mm
TCGU60-100RP	GY9.5	10	300	3.0	250	8.0	30,000	70x2	83	112
TCGU60-100RL	Lead Cable	10	300	3.0	250	8.0	30,000	70x2	83	112
TCGU60-100CL	Lead Cable	10	300	3.0	250	8.0	30,000	70x2	95	112
TCGU60-100ZRP	GY9.5	10	300	3.0	250	Oz Free	30,000	70x2	83	112
TCGU60-100ZRL	Lead Cable	10	300	3.0	250	Oz Free	30,000	70x2	95	112
TCGU60-100ZCL	Lead Cable	10	300	3.0	250	Oz Free	30,000	70x2	95	112
TCGU60-150RP	GY9.5	20	350	7.0	500	12.0	30,000	120x2	133	162
TCGU60-150RL	Lead Cable	20	350	7.0	500	12.0	30,000	120x2	133	162
TCGU60-150CL	Lead Cable	20	350	7.0	500	12.0	30,000	120x2	145	162
TCGU60-150ZRP	GY9.5	20	350	7.0	500	Oz Free	30,000	120x2	133	162
TCGU60-150ZRL	Lead Cable	20	350	7.0	500	Oz Free	30,000	120x2	133	162
TCGU60-150ZCL	Lead Cable	20	350	7.0	500	Oz Free	30,000	120x2	145	162
TCGU60-200RP	GY9.5	20	400	8.0	700	16.0	30,000	170x2	183	212
TCGU60-200RL	Lead Cable	20	400	8.0	700	16.0	30,000	170x2	183	212
TCGU60-200CL	Lead Cable	20	400	8.0	700	16.0	30,000	170x2	195	212
TCGU60-200ZRP	GY9.5	20	400	8.0	700	Oz Free	30,000	170x2	183	212
TCGU60-200ZRL	Lead Cable	20	400	8.0	700	Oz Free	30,000	170x2	183	212
TCGU60-200ZCL	Lead Cable	20	400	8.0	700	Oz Free	30,000	170x2	195	212
TCGU60-250RP	GY9.5	20	450	9.0	800	18.0	30,000	220x2	233	262
TCGU60-250RL	Lead Cable	20	450	9.0	800	18.0	30,000	220x2	233	262
TCGU60-250CL	Lead Cable	20	450	9.0	800	18.0	30,000	220x2	245	262
TCGU60-250ZRP	GY9.5	20	450	9.0	800	Oz Free	30,000	220x2	233	262
TCGU60-250ZRL	Lead Cable	20	450	9.0	800	Oz Free	30,000	220x2	233	262
TCGU60-250ZCL	Lead Cable	20	450	9.0	800	Oz Free	30,000	220x2	245	262
TCGW60-100RP	GY9.5	20	400	8.0	800	16	30,000	70x4	100	132
TCGW60-100RL	Lead Cable	20	400	8.0	800	16	30,000	70x4	100	132
TCGW60-100ZRP	GY9.5	20	400	8.0	800	Oz Free	30,000	70x4	100	132
TCGW60-100ZRL	Lead Cable	20	400	8.0	800	Oz Free	30,000	70x4	100	132

* R : Round Base C : Corner Base W : Double U-shapet tube

* P : Pin Type L : Lead Cable

* These specifications are subject to change without notice.